



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 048 833 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

02.11.2000 Bulletin 2000/44(51) Int. Cl.⁷: **F02B 47/08**(21) Application number: **00302311.6**(22) Date of filing: **22.03.2000**

(84) Designated Contracting States:

**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**

Designated Extension States:

AL LT LV MK RO SI(30) Priority: **30.04.1999 GB 9909872**

(71) Applicant:

**Ford Global Technologies, Inc.
Dearborn, Michigan 48126 (US)**(72) Inventor: **Tsoi-Hei-Ma, Thomas****South Woodham Ferrers, Essex CM3 5YL (GB)**

(74) Representative:

Messulam, Alec Moses et al**A. Messulam & Co. Ltd.,****43-45 High Road****Bushey Heat, Herts WD2 1EE (GB)**(54) **Internal combustion engine with exhaust gas recirculation**

(57) An engine is described that has a variable valve timing system. Under low and medium load operation of the engine, the valve timing system sets an extended valve overlap period and fuel is injected predominantly during this extended overlap period either into the intake ports or directly into the combustion chambers. The effect is that the fuel is heated by the internally recirculated exhaust gases which pre-conditions the fuel to improve ignitability and combustion quality.

EP 1 048 833 A2

Description

Field of the invention

[0001] The present invention relates to the fuelling of an internal combustion and is application to both gasoline and diesel engines.

Background of the invention

[0002] It has already been proposed to pre-condition fuel before it is injected into the combustion chambers of an engine by heating the fuel. Hitherto, this has been achieved using heat present in external EGR (exhaust gas recirculation) gases by injecting the fuel into an EGR pipe leading from the exhaust system to the intake system. This could only be achieved by means of additional equipment such as a fuel injector and a reaction chamber in the exhaust recirculation system

Object of the invention

[0003] The invention seeks to take make use of processes that normally take place in conventional four stroke internal combustion engines to enhance fuel preparation and to produce more reactive radicals in the intake charge at the commencement of combustion in order to improve the ignitability of the fuel and air mixture

Summary of the invention

[0004] According to one aspect of the invention, there is provided a four stroke internal combustion engine in which at least during certain engine operating conditions the intake and exhaust valves are open simultaneously to enhance internal exhaust gas recirculation by forcing a substantial quantity of hot exhaust gases back into the intake ports, the engine having a fuel injection system with fuel injectors arranged in the intake ports a variable valve timing system operative, at least during the said engine operating conditions, to prolong the valve overlap period when the intake and exhaust valves are simultaneously open, and means for controlling the timing of the fuel injectors to introduce substantially all of the injected fuel directly into the back flow of internal EGR gases during the extended valve overlap period, the fuel being thermally conditioned by the hot internal EGR gases before being admitted into the combustion chamber during the subsequent intake stroke.

[0005] In order to determine the optimum timing for port fuel injection, it has previously been attempted to vary the timing of fuel injection in relation to the operating cycle of the engine. By such experimentation, it has been determined that when the fuel is injected into the intake ports with the intake valves closed, the fuel is

deposited on the hot walls of the intake ports and is heated and preconditioned before being drawn into the engine. This resulted in more reliable ignition and more complete combustion. When fuel is injected into the intake ports with the intake valves open, on the other hand, it has been found that the resulting combustion is not satisfactory because of poor mixing and less reliable ignition. In this case, the fuel has little time to be heated and is entrained by the intake air and deposited on the walls of the combustion chamber.

[0006] While attempting all possible injection timings, it is likely that it was attempted to inject fuel during the very brief valve overlap period. However, because this period is normally of much shorter duration than the fuel injection period, the advantageous effect achieved in the present invention has not previously been recognised. The important difference to note is that in the present invention special steps need to be taken to prolong the valve overlap period in order to ensure that substantially all of the injected fuel can be timed to be introduced into the hot EGR gases during the valve overlap period.

[0007] According to a second aspect of the invention, there is provided a four stroke internal combustion engine in which, at least during certain engine operating conditions, the intake and exhaust valves are open simultaneously to enhance internal exhaust gas recirculation by forcing a substantial quantity of hot exhaust gases back into the intake ports, the engine having a fuel injection system with fuel injectors arranged in the combustion chambers, a variable valve timing system operative, at least during the said engine operating conditions, to prolong the valve overlap period when the intake and exhaust valves are simultaneously open, means for controlling the injection timing of the fuel injectors to introduce substantially all of the injected fuel directly into the residual gases in the combustion chambers during the extended valve overlap period, and means for creating a pressure drop from the exhaust ports towards the intake ports during the valve overlap period to ensure that the injected fuel does not pass out of the combustion chamber through the open exhaust valve, the fuel being thermally conditioned by the hot residual gases before the commencement of the subsequent intake stroke.

[0008] The second aspect of the invention differs from the first in that the fuel is injected directly into the combustion chambers rather than the intake ports. For this reason, it is necessary to take steps to control the pressures in the intake and exhaust ports to ensure that the injected fuel remains in the combustion chamber and is not allowed to escape through the open exhaust valve before it has been burnt.

[0009] In both its aspects, the invention sets out to achieve thermal conditioning of the injected fuel by ensuring that it is heated by the hot burnt gases from the previous operating cycle before commencement of the subsequent intake stroke, thereby improving the ignita-

bility of the fuel in the subsequent operating cycle. This can be used to achieve a more robust ignition during lean burn operation or to promote spontaneous ignition during low and medium load operation in order to reduce NOx emissions.

[0010] The means for ensuring sufficient pressure drop from the exhaust ports towards the intake ports may be an intake throttle for restricting the intake air flow and reducing the pressure in the intake ports. Alternatively the means may be an exhaust throttle for restricting the exhaust gas flow and increasing the pressure in the exhaust ports. As a further alternative, an intake throttle and an exhaust throttle may be used in combination.

[0011] The invention is applicable to both gasoline and diesel fuels and is advantageous in promoting thermal pre conditioning of the fuel by the hot residual gases retained in the cylinder thus improving the ignitability of the fuel when it is burnt in the immediately following engine cycle

[0012] For a spark ignition engine, the lean burn capability of the engine can be significantly extended resulting in lower fuel consumption and lower exhaust emissions

[0013] Under certain conditions, the fuel may be sufficiently preconditioned to undergo spontaneous ignition without relying on a spark when it is mixed with air and compressed during the immediately following compression stroke. This type of combustion, called active radical combustion (ARC) by Honda, premixed charge compression ignition (PCCI) by Toyota or homogeneous charge compression ignition (HCCI) by Southwest Research Institute, is different from the conventional gasoline type spark ignition or diesel type compression ignition in that the whole cylinder charge ignites spontaneously and simultaneously, resulting in ultra-low NOx emissions

Brief description of the drawings

[0014] The invention will now be described further, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a schematic representation of an embodiment of the first aspect of the invention, and Figure 2 is a similar view of an embodiment of the second aspect of the invention.

Detailed description of the preferred embodiments

[0015] Figure 1 shows a cylinder of a four stroke internal combustion engine having a piston 12 and a combustion chamber 10. Air is introduced into the combustion chamber through an intake pipe 24 having a butterfly throttle 34 and fuel is added to the intake air by means of a fuel injector 30 positioned to spray fuel into the intake port. Gases are discharged from the combus-

tion chamber 10 through an exhaust pipe 26. The intake and exhaust events are controlled by intake and exhaust valves 14 and 16 which are themselves acted upon by a variable valve timing system. The valve timing system may in its simplest form comprise separate camshafts for operating the intake and the exhaust valves and a phase shifting mechanism for advancing and retarding the two camshafts relative to one another and relative to the four stroke engine cycle.

[0016] The embodiment of Figure 2 is essentially the same as Figure 1 and to avoid unnecessary repetition, like components have been designated by like reference numerals. The essential differences are that in place of the port fuel injector 30 there is an in-cylinder fuel injector 32, and a second butterfly throttle 36 is provided in the exhaust pipe in order to increase the exhaust back pressure.

[0017] In operation, during low and medium operation, the valve timing system of the engine is set to prolong the valve overlap period, that is to say the period, where as shown in the drawings, the intake valve 14 and the exhaust valve 16 are open at the same time while the piston 12 is moving towards its top dead centre position. In the case of the embodiment of Figure 1, the high pressure in the combustion chamber at the end of the previous cycle coupled with the low pressure in the intake port caused by the throttle 34 forces exhaust gases back into the intake port. In the invention, the fuel injector 30 is timed to open and inject fuel into the intake port at the time that the port is filled with the back flow of hot EGR gases which heat the fuel and precondition it. During the continuation of the intake stroke, these EGR gases are drawn back into the combustion chamber along with the fuel they contain, and fresh air is drawn in afterwards. Depending on the design of the intake system and the combustion chamber, the EGR gases containing the fuel can either be homogeneously mixed with the intake air charge, or kept separate if the charge is stratified.

[0018] In the embodiment of Figure 2, the fuel is directly injected into the combustion chamber during the valve overlap period and there is a risk of some of the fuel escaping during the upstroke of the piston out of the open exhaust valve 16. To reduce or eliminate this tendency, it is possible to rely on the reduced pressure in the intake port that is caused by the throttle 34, but it is preferable additionally to increase the pressure in the exhaust port by partially closing the throttle 36 to increase the exhaust back pressure.

Claims

1. A four stroke internal combustion engine in which, at least during certain engine operating conditions, the intake and exhaust valves are open simultaneously to enhance internal exhaust gas recirculation by forcing a substantial quantity of hot exhaust gases back into the intake ports, the engine having

a fuel injection system with fuel injectors (30) arranged in the intake ports (24), a variable valve timing system operative, at least during the said engine operating conditions, to prolong the valve overlap period when the intake (14) and exhaust (16) valves are simultaneously open, and means for controlling the timing of the fuel injectors to introduce substantially all of the injected fuel directly into the back flow of internal EGR gases during the extended valve overlap period, the fuel being thermally conditioned by the hot internal EGR gases before being admitted into the combustion chamber during the subsequent intake stroke.

6, wherein the fuel is sufficiently preconditioned to undergo spontaneous ignition when mixed with air and compressed during the immediately following compression stroke.

2. A four stroke internal combustion engine in which, at least during certain engine operating conditions, the intake and exhaust valves are open simultaneously to enhance internal exhaust gas recirculation by forcing a substantial quantity of hot exhaust gases back into the intake ports, the engine having a fuel injection system with fuel injectors (32) arranged in the combustion chambers, a variable valve timing system operative, at least during the said engine operating conditions, to prolong the valve overlap period when the intake (14) and exhaust (16) valves are simultaneously open, means for controlling the injection timing of the fuel injectors to introduce substantially all of the injected fuel directly into the residual gases in the combustion chambers during the extended valve overlap period, and means for creating a pressure drop from the exhaust ports towards the intake ports during the valve overlap period to ensure that the injected fuel does not pass out of the combustion chamber through the open exhaust valve, the fuel being thermally conditioned by the hot residual gases before the commencement of the subsequent intake stroke.
3. An internal combustion engine as claimed in claim 1 or claim 2, wherein an intake throttle (34) is provided for restricting the intake air flow and reducing the pressure in the intake ports.
4. An internal combustion as claimed in any preceding claim, wherein an exhaust throttle (36) is provided for restricting the exhaust gas flow and increasing the pressure in the exhaust ports.
5. An internal combustion engine as claimed in any preceding claim, wherein the engine is a spark ignition engine.
6. An internal combustion engine as claimed in any one of claims 1 to 4, wherein the engine is a compression ignition engine.
7. An internal combustion engine as claimed in claim

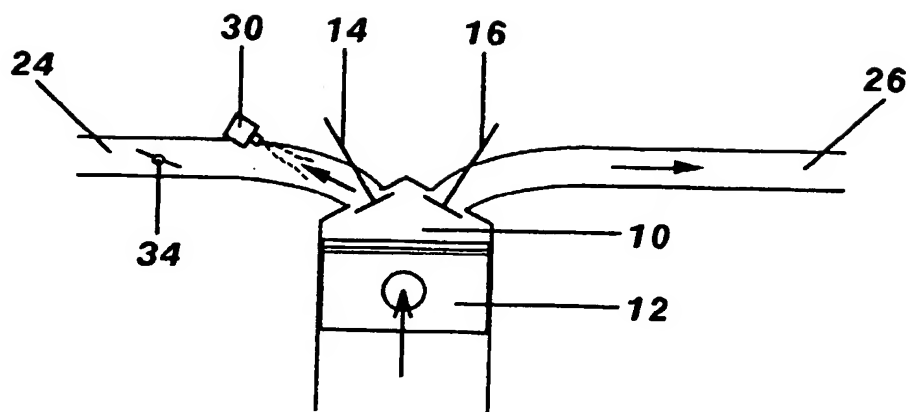


Fig. 1


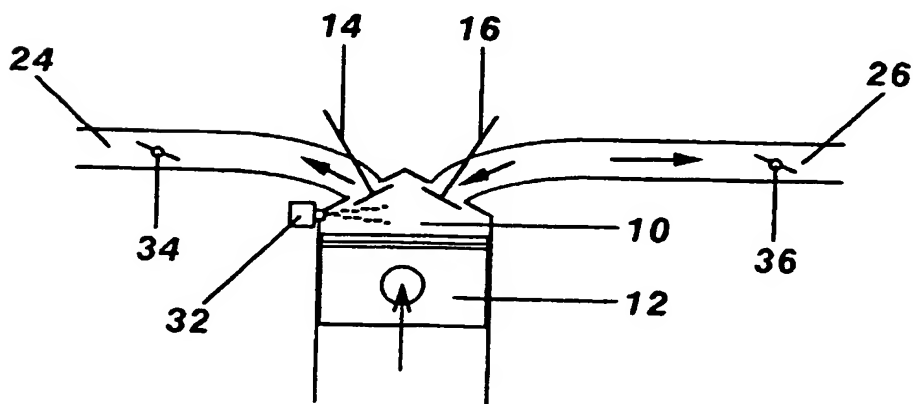


Fig. 2



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 048 833 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
23.05.2001 Bulletin 2001/21

(51) Int. Cl.⁷: **F02B 47/08**

(43) Date of publication A2:
02.11.2000 Bulletin 2000/44

(21) Application number: 00302311.6

(22) Date of filing: 22.03.2000

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 30.04.1999 GB 9909872

(71) Applicant:
**Ford Global Technologies, Inc.
Dearborn, Michigan 48126 (US)**

(72) Inventor: **Tsoi-Hei-Ma, Thomas**
South Woodham Ferrers, Essex CM3 5YL (GB)

(74) Representative:
Messulam, Alec Moses et al
A. Messulam & Co. Ltd.,
43-45 High Road
Bushey Heath, Bushey, Herts WD23 1EE (GB)

(54) Internal combustion engine with exhaust gas recirculation

(57) An engine is described that has a variable valve timing system. Under low and medium load operation of the engine, the valve timing system sets an extended valve overlap period and fuel is injected predominantly during this extended overlap period either into the intake ports or directly into the combustion chambers. The effect is that the fuel is heated by the internally recirculated exhaust gases which pre-conditions the fuel to improve ignitability and combustion quality.

EP 1 048 833 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 30 2311

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	PATENT ABSTRACTS OF JAPAN vol. 1998, no. 09, 31 July 1998 (1998-07-31) & JP 10 103094 A (ISUZU CERAMICS KENKYUSHO:KK), 21 April 1998 (1998-04-21) * abstract *	1-7	F02B47/08
Y	--- PATENT ABSTRACTS OF JAPAN vol. 016, no. 321 (M-1279), 14 July 1992 (1992-07-14) & JP 04 091358 A (DAIHATSU MOTOR CO LTD), 24 March 1992 (1992-03-24) * abstract *	2-5	
Y	--- GB 2 313 623 A (FORD MOTOR CO) 3 December 1997 (1997-12-03) * the whole document *	1,6,7	
A	--- FR 2 703 107 A (ARLAUD ROGER) 30 September 1994 (1994-09-30) * page 5, last paragraph *	1	
A	--- EP 0 594 462 A (RICARDO CONSULTING ENG) 27 April 1994 (1994-04-27) * column 8, line 11 - line 45 *	1	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			F02B F02D
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 23 March 2001	Examiner Alconchel y Ungria,J
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date O : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 30 2311

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

23-03-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 10103094 A	21-04-1998	NONE	
JP 04091358 A	24-03-1992	NONE	
GB 2313623 A	03-12-1997	NONE	
FR 2703107 A	30-09-1994	NONE	
EP 0594462 A	27-04-1994	DE 69310082 D	28-05-1997
		DE 69310082 T	31-07-1997
		EP 0594463 A	27-04-1994
		JP 6200836 A	19-07-1994
		JP 6213080 A	02-08-1994
		US 5379743 A	10-01-1995

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82



THIS PAGE BLANK (USP.)